

# WhispEar

Feel Included

## INSTRUCTIONS

### WhispEar Transmitter



### WhispEar Earpiece



#### WhispEar Earpiece Specification:

1. Working frequency: UHF channel 150
2. Charging method: Plug in USB charging cable. It can be fully charged in 2.5 hours dependant upon plug/device.
3. Working temperature: -20°~+70°
4. Receiving distance: 50-200 meters
5. Battery life: 4 to 6 hours
6. Size: 70mm(L)\*49mm(W)\*16mm(H) without hanging ears
7. Battery capacity: 200mAh 3.7V
8. Battery charging: When the battery is low, the green light flashes quickly. Use the USB charging lead to charge. Charging, red indicator; full, blue indicator
9. Automatic shutdown: the receiver will shut down within 30 minutes without pressing any buttons.

## QUICKSTART

WhispEar Devices are paired before dispatch

1. Insert microphone
  2. Slide the switch to "On"  


\*Change channel if required.
  3. Press the power button until the green light.
  4. Insert into ear defender or over ear.
- \*If it does not automatically pair, press the power button and volume '+' at the same time until the green light stays on.

5. Speak into the microphone  

Position the microphone as close to the mouth as possible. Optimum distance is between 5-10 but also provides good clarity up to 20cm. Clip the microphone to clothing just below the chin.

### LOCK

Turn the switch to "LOCK" and the screen will display "🔒"  
 When the phone is locked you can still use the MUTE button

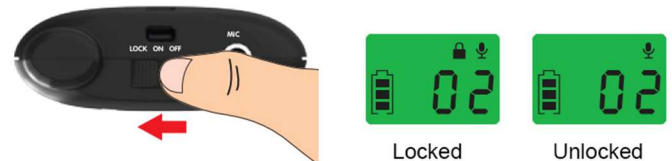

### MUTE

